



# MB - P

## FORCE AND SENSIBILITY!


**Impact mechanism for integration.** Ideal for getting a fast and deep marking of logos, texts and numbers. Pneumatic actuation of the rack through a double effect piston. Installation at any angle. Maximum sensitivity and precision with strict rack adjustment. Bankholder effect to prevent any deformation of the material. Same marking depth on items of different heights. Many accessories available, such as cliché, types, type holders, numbering heads to personalize the marking. Suitable also for machining operators for pressing, rivetting, inserting, bending and caulking.

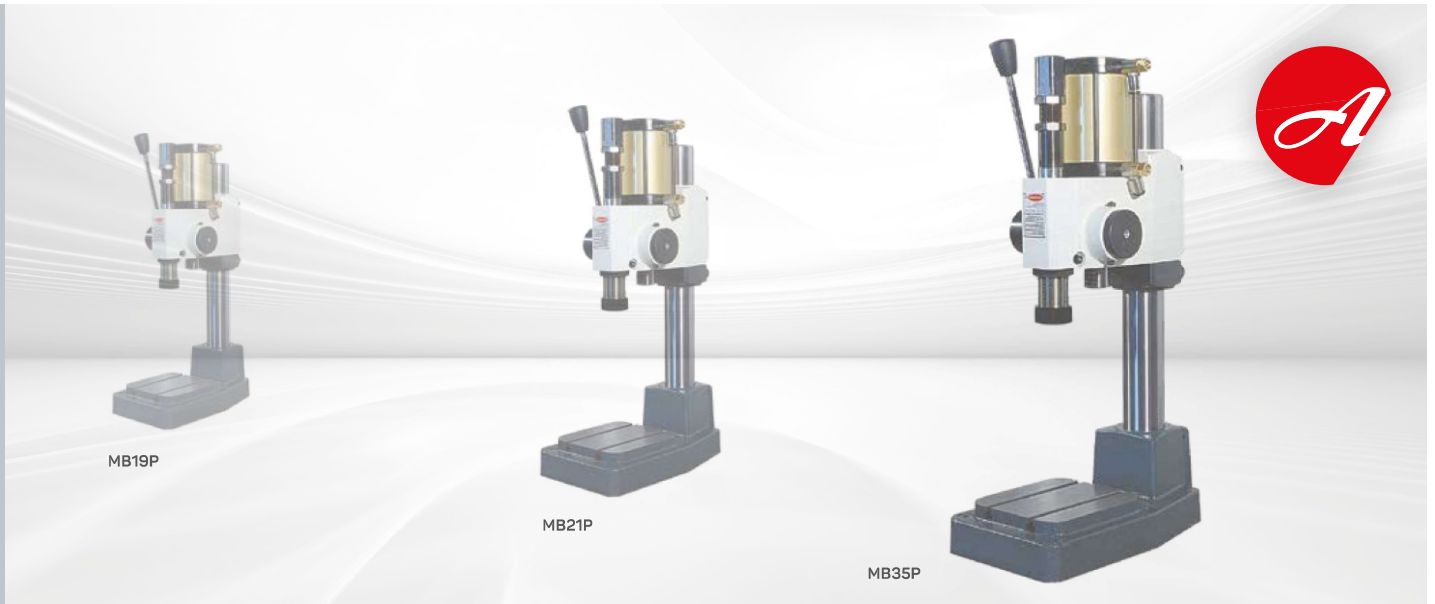

	MB19P	MB21P	MB35P
Dimension (mm)	138x350x225	208x600x355	300x800x505
Adjustable power (kg / kN)	100/1	250/2,5	450/4,5
Item maximum height (mm)	175	318	380
Weight (kg)	14,5	53	162
Cava a T (mm)	6	10	12
Shank diameter (mm)	dia 13	dia 27	dia 27
Rack stroke (mm)	22	67	80
Usable stroke (mm)	22	67	80
Maximum air pressure (bar)	4	6	6
Air supply (gas)	1/8	1/4	1/4



MB19P-21P-35P



MB125P

Measures in mm

	MB19P	MB21P	MB35P
A	350	600	800
B	225	355	505
C	110	176	242
D	112	180	268
E	40	65	67
F	65	118	172
G	45	110	175
K	36	60	100
J	20,5	37	44
L	56	102	170
M	34	44	56,5
N	110,5	183	274,5
P	46	80	113
Q	110	168	242
R	55	84	112
S	138	208	300
T	27	50	72